

Carlube Triple R 5W-30 Fully Synthetic R-Tec 16

Technical Data Sheet



Dependable, Reliable and Versatile

Carlube Triple R 5W-30 R-Tec 16 is a trustworthy, reliable and functional engine oil, developed to protect the key components in a modern engine from excessive wear, while maintaining clean components that remain free of corrosion.

Performance Benefits

Carlube Triple R 5W-30 R-Tec 16 has achieved accreditation through the successful completion of several testing programs including industry wide performance levels such as API SL and ACEA A3/B4 and OEM approvals such as Daimler MB 229.3 and Renault RN0700/710. Such diverse accreditation ensures that Carlube Triple R 5W-30 R-Tec 16 provides strong lubricant performance immediately from low temperatures up to the warmest climatic conditions.


The successful approval from industry bodies and OEMs requires strong performance in many test procedures. Carlube Triple R 5W-30 R-Tec 16 boasts 97% less bore polishing than the ACEA A3/B4 test limits permit, demonstrating excellent wear control in this severe region of the engine.

Tested at temperatures as low as -36°C, Carlube Triple R 5W-30 R-Tec 16 performs when engines are at the most risk. It remains viscous and fluid, able to flow to the most vulnerable areas of an engine during the cold winter months in Northern Europe and beyond.


Carlube Triple R 5W-30 R-Tec 16 protects engines from wear and corrosion all year round.



Piston Cleanliness

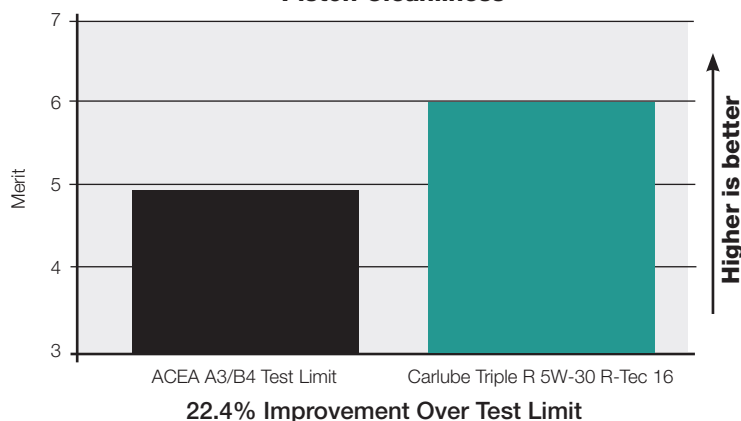

Engine Sludge Reduction

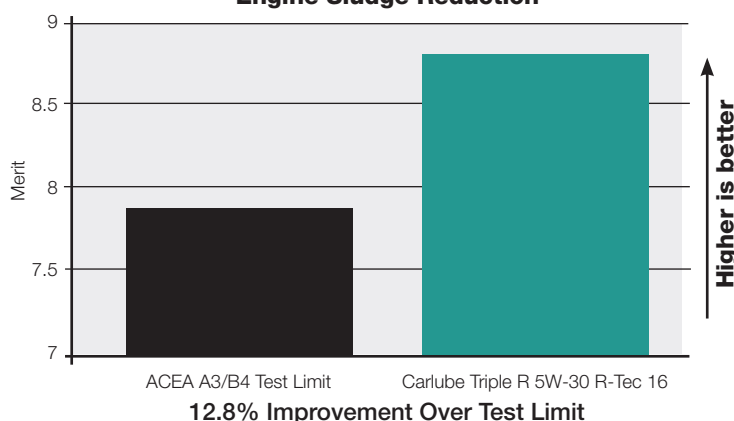

Carlube Triple R 5W-30 Fully Synthetic R-Tec 16 Performance Specifications

Issuing Body	Performance Specification
ACEA	A3/B4
API	SL
VOLKSWAGEN	VW 50200/50500
DAIMLER	MB 229.3
RENAULT	RN0700/710



Product Reference

Size	Part No	Barcode
1 Litre	KBK001	5010373116593
5 Litre	KBK005	5010373116609
20 Litre	KBK020	5010373116616
60 Litre	KBK060	5010373116623
199 Litre	KBK199	5010373116630
500 Litre	KBK500	N/A
1000 Litre	KBK100	N/A

Properties

Property	Result
SAE Viscosity Grade	5W-30
Density @ 15°C (g/mL)	0.8543
Kinematic Viscosity (mm ² /s)	@40°C 70.7 @100°C 12.0
Viscosity Index (VI)	168
Pour Point (°C)	-36
Flash Point (°C)	232
Sulphated Ash (%)	1.2

Environmental Protection & Safety Precautions

Do not pour used surplus oil down sewers or drains. Dispose of used or surplus oil at your nearest oil-recycling bank. Dispose of empty packs in a responsible manner. Store container in an upright position and secure when transported. Wear goggles if splashing risk. Avoid exposure to oil mist. When using oil do not eat, drink or smoke. Wash hands after use.

Disclaimer

This Product Information Sheet does not constitute to any extent a fitness for purpose warranty or a quality specification. It is intended to be indicative only of the general characteristics of the product(s) and may not be relied upon (in whole or in part) in substitution of nor as a supplement to any of the information and/or instructions and/or warnings set out on the product(s) and/or on any packaging and/or in the relevant Safety Data Sheet (which is available on request).

Users of a product marked "For Professional Use Only" are deemed to declare and acknowledge for themselves professional levels of skill, knowledge, competence and experience in the selection and use of such product(s).

Product Information Sheets are updated from time to time and inquiries should be made on a regular basis to ensure that this is the latest version available.